











FEATURES THAT SUITS IN EVERY NEED

Since the turn of the coming decades, beauty-inspired carved tiles have established a permanent place in the industry. In addition to the features listed below, these tiles have a wide range of additional features that make them more fashionable, trending, and comfortable to use overall.



UNALTERABLE TO UV RAYS



FIRE RESISTANT



IMPERVIOUS



LIGHTNESS



LOW ABSORPTION



FROST



RESISTANT TO CHEMICAL ATTACK



RESISTANT TO STAINS



FAST ASSEMBLY



100% RECYCLABLE




APPROACH AREA

Incorporating the touch of luxurious comfort into your ambiance that reflects the essence of royalty while infusing the invigorating color and design that will be beautifully changing the atmosphere with the wow factor that can be used in many areas.

With all of the designs, your ambiance will be infused with luxury touches that will knock your socks off. We strive to bring you the very best of excellence for your decor, that not only enhances & enhances the best design options, but also improves the quality!

An influx of natural beauty into a space can immediately create a stunning appearance that draws attention with the addition of our collection!

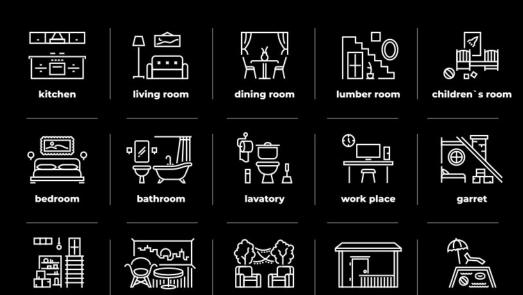


patio

terrace


pool


basement


loggia





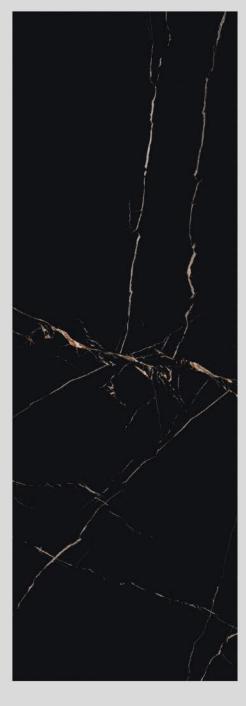



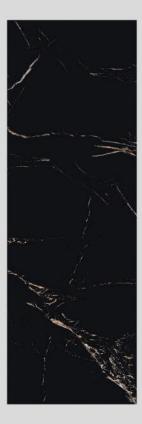

DELIGHT MARQUINA

Available size : 800x2400mm

Thickness 15mm

Finish Digi Matt

Design Random (3Phase)

























Available size : 800x2400mm

Thickness 15mm

^{Finish} Digi Matt

Design Random (2Phase)











ANTIQUE GREY


Available size : 800x2400mm

Finish Digi Matt

Design Random (3Phase)























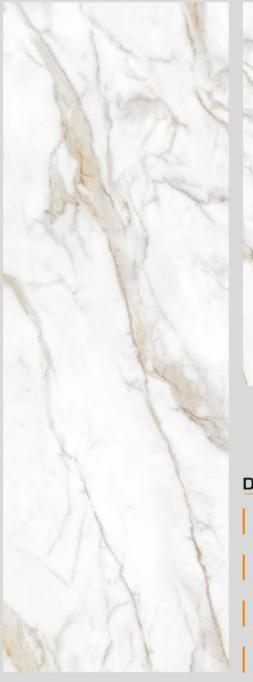



DIAMOND GOLD

Available size : 800x2400mm


Thickness 15mm

Finish Digi Matt

Design End Less (3 Phase)














TROPICAL GLAM

Available size : 800x2400mm

Thickness 15mm

Finish Digi Matt

Design Random (2Phase)

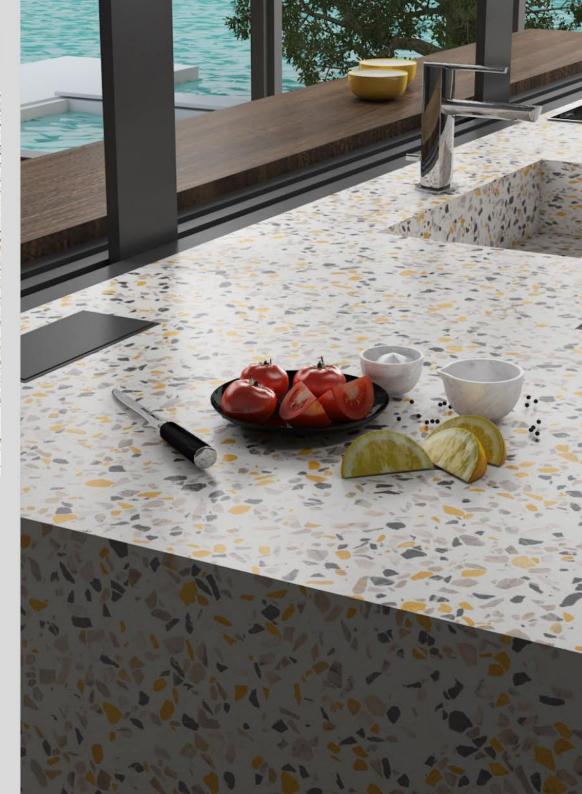



DIGI MATT


















STATUARIO VOLAKAS

Available size : 800x2400mm

Design End Less (3 Phase)












Available size : 800x2400mm

Thickness 15mm

Finish Digi Matt

Design Random (2Phase)

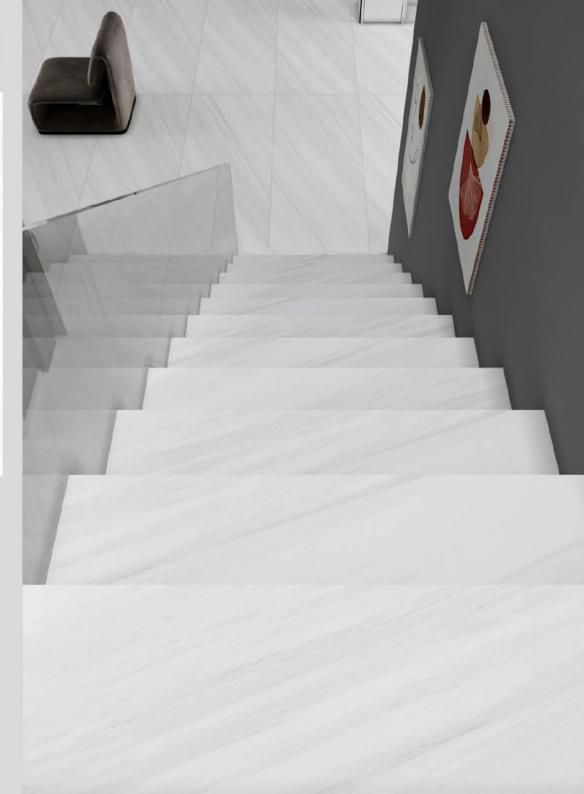









TERRAZZO WHITE

Available size : 800x2400mm

Thickness 15mm

Finish Digi Matt

Design Single Phase





















UNIQUE DESIGNS OF 800X2400MM


You will be able to enjoy the comfort of your kitchen with the warmth of the environment that enhances the elegance of the style segment with the classic touch element. 12 different styles are available in 12 different look perspectives.




MANUALLY TRANSPORTING **DIGI MATT**


Only for 1/4" Slabs

MOVING A DIGI MATT





RAISING A DIGI MATT ONTO A BENCH







X INCORRECT

√ CORRECT

HANDLING DIG! MATT FOR WALL





X INCORRECT

√ CORRECT

WORKING WITH THE VARIOUS VERSIONS OF DIGI MATT

CUTTING WITH DIAMOND DISCS





Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). Itmay be required to cool the disc with water. Recommended discs are the thin typesgenerally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath

DRILLING





You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, electrical drills as an alternative.

INTERNAL CUT / L-SHAPED CUT



To get internal and L-shaped corners & to reduce the risk of breakage, round o the vertex of the internal comer using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and out using diamond discs, follow the instructions provided above.


When using these tools:
-Cool the point being drilled with water
-Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
-If you are using tungsten bits, start drilling at a low speed

-If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING







CLEANING & MAINTENCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	Detergent Determine Teachers and Teachers an	
Grease	Alkaline - Solvent		
Oil	Solvent	Ammonia, Backing Soda	
lnk	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover	
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic	
Lime	Acid	Descaling Reagent, Hydro Chloric Acid	
Cement	Acid	Hydro Chloric Acid	
Wine	Alkaline	Ammonia, Liquid Bleach	
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach	
Rubber	Solvent	Alcohol, Thinner	
Plaster	Acid	Hydro Chloric Acid	
Candle Wax	Solvent	Alcohol, Thinner	
lodine	Oxidant	Liquid Bleach	
Blood	Oxidant	Liquid Bleach	
Ice Cream	Alkaline	Liquid Bleach	

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
	Regulatory Pr	operties	
Deviation in Length & Width	±0.5%	±0.2%	ISO 10545-2
Deviation in Thickness	±5%	<u>+</u> 5%	ISO 10545-2
Straightness of Sides	±0.5%	±0.2%	ISO 10545-2
Rectangularity	±0.5%	±0.2%	ISO 10545-2
Surface Flatness	±0.5%	±0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	∆E<0.30	ISO 10545-16
Glossiness	As per Mfg.	As per Mfg.	Gloss Meter
	Structural Pro	pperties	
Water Absorption	≤0.5 %	≤0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
•	Massive Mechanic	al Properties	
Moduls of Repture	Min.35N/mm²	Min.40N/mm²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 5000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
i.	Surface Mechanica	al Properties	·
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
	Thermo Hygrometri	c Properties	
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
	Chemical Pro	operties	ži.
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
	Safety Prop	perties	
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

DIMENSION (mm)	No of PC's/Box	SQUARE FEET	WEIGHT (APPROX)
800x2400mm	1	20.66	68 Kgs

Take note: Please follow the Company's guidelines for cutting and applying tiles. This will ensure quality and remarkable results.

Pavagadhi Ceramic

Jay Ambe Ceramic, 8-A National Highway, Morbi - 363642

e-mail: pavagadhiceramic@gmail.com www.pavagadhiceramic.com

Mo. +91 99092 81254 / +91 93281 33207